

# GEBERIT OMEGA60 ACTUATORS

## For Omega Concealed Tanks, 2x6 Installations

### SPECIFICATIONS

Actuators for concealed tank and carrier system. Actuator flush plates and push buttons shall be glass, zinc die-cast, and plated to guard against scratches. For tile, stone or other hard surfaced walls only. All components shall be compliant with applicable codes and product standards.

### FEATURES

- Designed to maintain appearance push after push
- Moving parts are accessible behind actuator flush plate
- Made of glass, zinc die cast and plated
- Available in a variety of unique combinations of finish/color
- Incorporates water saving possibilities when used with Geberit dual-flush tanks 1.6 GPF (6 LPF) and 0.8 GPF (3 LPF) or 1.28 GPF (4.8 LPF) and 0.8 GPF (3 LPF)
- Includes mounting frame and hardware
- Optional cover frame available as needed to cover rough edges or imperfect wall openings.

### WARRANTY


- One-year limited warranty.

### Dual-Flush Actuators, Omega 2x6 Installation


Style	Material	Finish	Model No.
	Glass	Brushed Chrome	115.081.GH.1
		White Glass-Aluminum	115.081.SL.1
		Black Glass-Aluminum	115.081.SJ.1
	Umber Glass-Aluminum	115.081.SQ.1	
Zinc	Cover frame (when needed)	Brushed Chrome	115.086.GH.1
	Cover frame (when needed)	Polished Chrome	115.086.21.1

### DIMENSIONS

#### Omega60 Dual-Flush

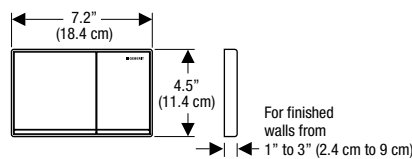

#### Omega60 Cover Frame



Products marked with comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.



Geberit  
2100 S. Clearwater Drive  
Des Plaines, IL 60018  
USA

P 847-803-7777  
F 847-849-1845

www.geberit.us

ARCHITECT/ENGINEER APPROVAL	
Job Name:	_____
Date:	Quantity: _____
Model Specified:	_____
Variations Specified:	_____
Customer/Wholesaler:	_____
Contractor:	_____
Architect:	_____