

# GEBERIT FLUSHING SYSTEM

For 1.6/0.8 GPF (6/3 LPF) Floor-Mount, Back Outlet Toilets, 2x4 Installations

## PRODUCT SPECIFICATIONS

In-Wall Sigma concealed tank with actuator flush panel or pneumatic push button for washdown floor mounted toilet with rear water inlet. System shall fit within minimum 3½" (90 mm) framing wall or plumbing chase, with wood construction or steel framing members placed 19¾" (500 mm) apart. Water supply shall have flow diameter no smaller than 1/2" (13 mm) copper tube, and a minimum flow pressure of 2 PSI (0.01 MPa). The toilet bowl shall be a third party listed low-consumption 1.6 GPF (6 LPF) or 1.6/0.8 GPF (6/3 LPF) dual-flush floor mounted toilet with rear water inlet type. All components shall be compliant with applicable codes and product standards.

## FEATURES


- Water consumption – Dual-flush system allows 1.6/0.8 GPF (6/3 LPF) giving effective flush volume of 1.1 GPF (4 LPF)
- Anti-siphon fill valve
- Impact resistant high density polyethylene (HDPE) tank, insulated to prevent condensation
- Bowl rim height depends on ceramic chosen. See manufacturer for details
- For finished walls up to 3½" (9cm) thick
- For use with Geberit Sigma actuator plates (not included)
- Includes installation and rough-in materials

Complies with the latest editions of:


- ASME: A112.19.5, A112.19.14
- ANSI Z124.4
- CSA B125.3
- ANSI/ASSE 1002
- IAPMO PS-50
- UNAR / UNAR-HET
- ASME A112.19.2
- State of Massachusetts listed

## WARRANTY

- Limited lifetime warranty on tank and carrier, 10-year warranty on fill valve

Products marked with  comply with the American Disabilities Act (ADA) when installed per the requirements of the latest ADA Accessibility Guidelines (ADAAG) and/or ICC/ANSI A117.1.

Where water closet grab bars are required and corresponding reinforcement provided as outlined in the latest NYC Building Code and Federal FHA Guidelines, the installed product complies both for grab bars installed at the time of initial construction as well as for grab bars planned for future installation.

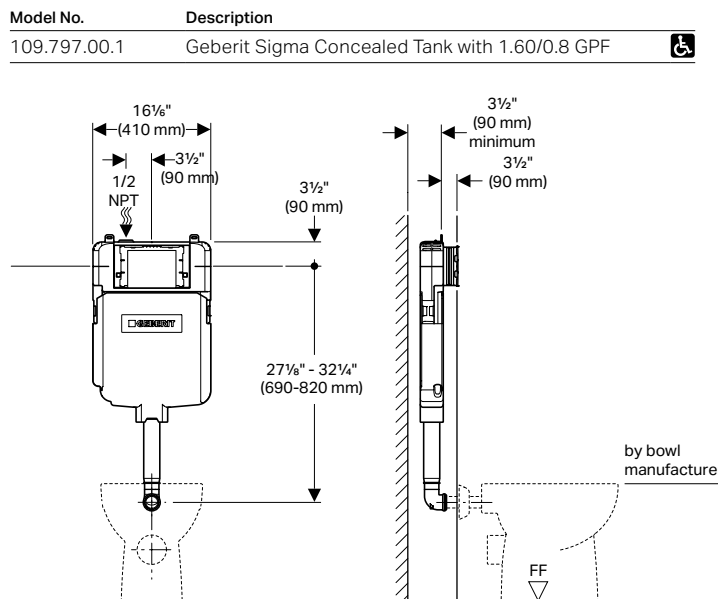

**ARCHITECT/ENGINEER APPROVAL**

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model Specified: \_\_\_\_\_

Variations Specified: \_\_\_\_\_

Customer/Wholesaler: \_\_\_\_\_

Contractor: \_\_\_\_\_

Architect: \_\_\_\_\_

# GEBERIT FLUSHING SYSTEM

For 1.6/0.8 GPF (6/3 LPF) Floor-Mount, Back Outlet Toilets, 2x4 Installations

## COMPATIBLE 1.6/0.8 GPF (6/3 LPF) FLOOR MOUNT TOILET BOWL MODELS

| Brand Name      | Model Number* | Model Name   |
|-----------------|---------------|--------------|
| Devon & Devon   | WCBTWBLU      | Blues        |
|                 | WCBTWCLA      | Classica     |
|                 | WCBTWET       | Etoile       |
|                 | WCBTWNET      | New Etoile   |
|                 | WCBTWROS      | Rose         |
|                 | WCBTWWES      | Westminster  |
| Duravit         | 216909        | ME by Starck |
|                 | 216959        | ME by Starck |
| Laufen          | 823338        | Kartell      |
| Neo-Metro       | 8951-W-2      | Euro-Urban   |
| Villeroy & Boch | 6607 U1 XX    | Subway       |

\* Consult toilet manufacturers for up-to-date model numbers and availability.

**Geberit**  
2100 S. Clearwater Drive  
Des Plaines, IL 60018  
USA

**P 847-803-7777**  
**F 847-849-1845**

**[www.geberit.us](http://www.geberit.us)**